

042205

517,893

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
24 December 2003 (24.12.2003)


PCT

(10) International Publication Number
WO 03/106313 A1

- (51) International Patent Classification⁷: **B65H 18/14**, 18/26 // 18/20
- (21) International Application Number: PCT/FI03/00456
- (22) International Filing Date: 10 June 2003 (10.06.2003)
- (25) Filing Language: Finnish
- (26) Publication Language: English
- (30) Priority Data:
20021154 14 June 2002 (14.06.2002) FI
- (71) Applicant (for all designated States except US): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KOUTONEN, Pauli** [FI/FI]; Apupapintie 2, FIN-05400 Jokela (FI). **JORKAMA, Marko** [FI/FI]; Jenkkapolku 30 A, FIN-04420 Järvenpää (FI).
- (74) Agent: **FORSSÉN & SALOMAA OY**; Eerikinkatu 2, FIN-00100 Helsinki (FI).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- with international search report
 - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: METHOD FOR CONTROLLING THE STRUCTURE OF A FIBROUS WEB ROLL, FOR EXAMPLE, A PAPER OR BOARD ROLL

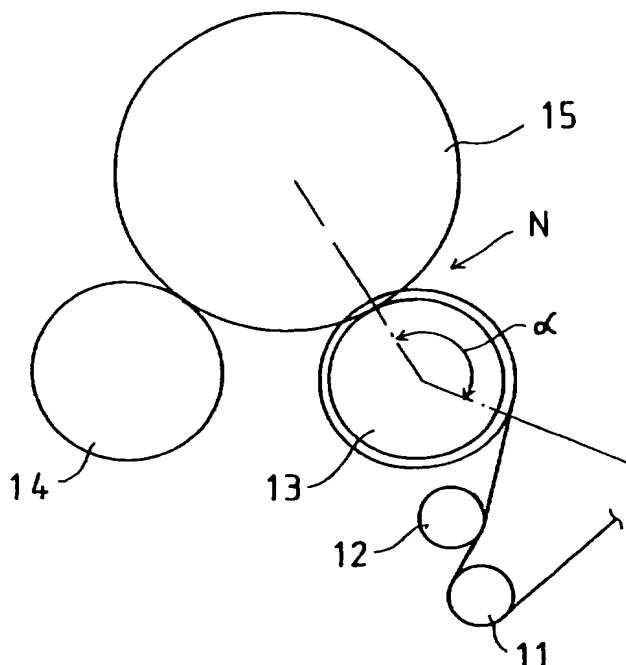

(57) Abstract: The invention relates to a method for controlling the structure of a fibrous web roll, in which method a fibrous web (W) is wound into a fibrous web roll (15) through a winding nip (N) between the fibrous web roll (15) being formed and a winding drum (13). In the method, the structure of the fibrous web roll (15) being formed is controlled by regulating the direction of passing the web to a windup, thereby regulating the wrap angle.

WO 03/106313 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method for controlling the structure of a fibrous
web roll, for example, a paper or board roll

5

The invention relates to a method according to the preamble of claim 1.

As known in the state of the art, a fibrous web is wound into rolls by means of
many different types of winders, for example, two-drum winders, in which a
10 fibrous web is wound into a roll, while supported on two winding drums, through
a nip between one winding drum and a fibrous web that is being formed. The web
can be passed to the two-drum winder either from above, i.e. from above the
winding drum to the nip between the winding drum and the fibrous web roll
forming the winding nip, or from below, so that the web is passed from below the
15 winding drum to the winding nip between the winding drum and the fibrous web
roll that is being formed.

Primarily three types of two-drum winders are known from the state of the art:
winders having winding drums which are hard, steel surfaced; winders in which
20 the rear winding drum or both winding drums are soft surfaced, for example,
rubber surfaced; and the winder marketed by the applicant under the *trademark*
WinBelt, in which a belt arrangement disposed around two guide rolls is used as a
winding drum.

25 In winding, for example, center winding is also used in which the web roll that is
building up is supported at its center, and the fibrous web is wound into a web roll
through a nip between a winding drum and the web roll being formed.

As known from the state of the art, when controlling the structure of a fibrous web
30 roll, above all its hardness, it has been affected, among other things, by changing
the tension of the web being wound, by regulating the torque differential between

the winding drums in a two-drum winder and by regulating center drive or surface traction in a center winder. In addition, the structure of the fibrous web roll has been affected by means of friction, for example, by selection of the winding drum coating.

5

It has been possible to wind rolls of a slightly larger diameter on prior-art two-drum winders that use a soft surface drum as one or both winding drums as compared with two-drum winders that use hard winding drums with a steel surface, because a soft surface tightens the roll more than a hard surface without giving rise to winding defects. However, when using soft surface winding drums, one problem can be that the soft surface may have tightened the roll even too much.

When a soft surface drum is used in winding, the tightening effect of the nip on the web increases, with the result that it may become a problem that the tightening effect increases too much, so that the roll becomes too tight and the surface sheets of the roll may break on a conveyor or during transport.

In the applications known today, the radial distribution of tension inside a roll in the running direction of the web is controlled by means of three winding parameters (*Kenneth G. Frye, Winding, p. 13, FIG. 17, Tappi Press, 1990*):

1. Regulating the tension of the web being wound just before a windup.
2. Regulating winding force. The winding force is the tightening of the sheet caused by torque differential in the outermost layer of the roll.
3. Regulating the radial nip load in the nips acting in connection with winding, for example, roll, winding drum, rider roll nips, and the like.

In brief, it may be stated that due to the effect of winding parameters the tension of the web just before a windup changes into wound-on-tension WOT (Wound-On-Tension i.e. the machine direction tension of the web in the outermost layer of

the web roll that is building up). This wound-on-tension determines the internal tension distribution of the roll being formed.

Because of the physical limitations of the value ranges of the above-mentioned winding parameters, in windups it often becomes necessary to strengthen or
5 weaken the WOT value attainable by the winding parameters.

In other words, the three winding parameters described above have physical limitations setting limits to where their effect can be used. Additional control
10 possibilities are needed for control of the roll structure.

Furthermore, when using a center winder, in some situations there is a need to regulate separately one component-web winding process at a particular station, in which connection there is a need to find a larger range of regulation for this
15 winding operation while not touching the control parameters of the other component-web winding parameters.

An object of the invention is to provide further possibilities for control of the structure of a fibrous web roll.
20

An object of the invention is also to provide a fourth winding parameter.

With a view to achieving the objects described above as well as those coming out later, the method according to the invention is mainly characterized by what is
25 stated in the characterizing part of claim 1.

In this invention, the inventors have realized the possibility of using the direction of passing a web into a windup, for example, a two-drum winder, a machine winder or a center winder, as a fourth winding parameter. The invention can be
30 applied particularly usefully when the winding drum is covered with an almost

incompressible "soft" cover. By 'soft' is meant in this connection a cover whose deformations in the nip are of the same order than those of the wound roll.

5 In accordance with an advantageous application of the invention, the structure of a fibrous web roll being formed is affected by means of a fourth winding parameter, the direction of passing the web into a winder, by regulating the wrap angle, or the angle which is covered by the fibrous web when it travels on a winding drum, i.e. on the drum that forms a winding nip with the web roll that is building up, before it enters the winding nip. The tightness of winding is controlled during running by
10 regulating the wrap angle. The effect of the wrap angle regulation on the structure of the web roll being formed depends on the properties of the fibrous web and on the roll covers used, such as, for example, hard rolls and soft cover rolls, in which in particular, in addition to softness, the Poisson ratio of the cover is of significance.

15 Thus, the fourth winding parameter according to the invention can be used very usefully in a two-drum winder having a soft rubber-like rear drum. In that case, by making the wrap angle smaller it is possible to prevent large-diameter rolls from becoming too hard at the surface, which is a problem in the state of the art. In
20 practice, this wrap angle as a function of the roll diameter is determined experimentally, i.e. a certain wrap angle function is set in the control system of the slitter-winder and the hardness distribution of rolls is measured. The wrap angle function is changed until the desired roll structure is achieved. This hardness regulation of a set can also be carried out for a particular station or roll,
25 if the wrap angle of the component webs can be controlled.

The fourth winding parameter used in connection with the invention also enables partial control of some other force quantities, in addition to WOT. As an example may be mentioned the tangential loads of the winding nip, which loads on certain
30 fibrous webs significantly contribute to the creation of J-lines, which J-lines

represent winding defects caused by slippage between winding layers (*Kenneth G. Frye, Winding, p. 15, FIGS. 25 & 26, Tappi Press, 1990*).

Thus, the control principle in accordance with the invention can be used in
5 different e.g. two-drum and center winders, among other things, in slitter-winders
and particularly appropriately in two-drum winders provided with soft cover
winding drums.

In accordance with the invention, the wrap angle curve, or wrap angle, as a
10 function of the roll diameter is changed, when needed, after each set change such
that the desired roll structure is achieved. When using a determination based on
wrap angle, the tighter, or the harder, the roll that is desired to be produced, the
larger the wrap angle that is selected while the other parameters affecting the
structure of the roll remain unchanged.

15

In the following, the invention will be described in greater detail with reference to
the figures in the appended drawing.

Figures 1A-1D schematically show one application of the invention in a two-drum
20 winder when the web is passed from above during winding.

Figures 2A-2C schematically show one application of the invention in a two-drum
winder when the web is passed from below during winding.

25 Figures 3A-3D schematically show one application of the invention in center
winding.

Figure 4 schematically shows a block diagram associated with the arrangement in
accordance with the invention.

30

Figs. 1A-1D schematically show winding on a two-drum winder in which a fibrous web roll 15 being formed is supported by winding drums 13, 14 and winding takes place through a winding nip N between one winding drum 13 and the fibrous web roll 15 being formed. A fibrous web W is passed into the winding
5 nip N via guide rolls 11 and 12. In accordance with the invention, the structure of the roll 15 being formed is controlled by changing the magnitude of the wrap angle α by changing the location of the guide rolls 11, 12 with respect to the winding drum 13 such that the wrap angle changes.

10 A positive large wrap angle α has been used in Fig. 1A, a positive small wrap angle α has been used in Fig. 1B, a zero angle α has been used in Fig. 1C, and a negative wrap angle α has been used in Fig. 1D.

Figs. 2A-2C illustrate an application of the invention in a two-drum winder in
15 which a web is passed from below and in which the fibrous web W is passed via guide rolls 21, 22 into a winding nip N from below a winding drum 23 forming the winding nip N with a fibrous web roll. A second winding drum, which supports the roll 25 being formed, has been designated by the reference numeral 24. The wrap angle α is regulated by changing the location of the guide rolls 21,
20 22 with respect to the winding drum 23 forming the winding nip N such that the angle α through which the web W travels on the winding drum 23 before entering the winding nip N, changes as desired.

In Fig. 2A there is a positive large wrap angle α , in Fig. 2B there is a positive
25 small wrap angle α , and a zero angle α has been used in Fig. 2C.

Figs. 3A-3D are schematic views of an application of the invention in center winding, in which a fibrous web roll 35 being formed is supported at its center and the winding takes place through a winding nip N between the roll 35 being
30 formed and a winding drum 33. A fibrous web W is passed to the winding drum

33 via a guide roll 31. The wrap angle α is changed by moving the position of the guide roll 31 with respect to the winding drum 33 such that the angle through which the web W travels on the winding drum 33 before entering the winding nip N, changes as desired.

5

In Fig. 3A there is a positive large wrap angle α , in Fig. 3B there is a positive small wrap angle α , in Fig. 3C there is a zero angle α , and in Fig. 3D there is a negative wrap angle α .

- 10 In accordance with the schematic block diagram illustration of Fig. 4, when the first set is wound, the wrap angle is selected according to the equation $\alpha_0 = \alpha_0(d)$, block 41, for example, depending on the paper grade based on experience. After the winding, the hardness distribution of the rolls being formed is measured, as shown in block 42. Examination of the hardness distribution is carried out in
- 15 block 43, if the hardness distribution is desired, i.e. in a good range, which is schematically indicated, for example, in block 45, and the wrap angle is selected according to the first winding in block 44 such that $\alpha_i = \alpha_i(d)$ ($i = 0$). If the hardness distribution achieved in the first set is not as desired, a change of the wrap angle is performed and a new wrap angle is determined as a function of the
- 20 hardness distribution in block 46 and in this way attempts are made to determine experimentally such a wrap angle that a desired hardness distribution is achieved for the rolls.

If it is possible to measure WOT in the slit during running, the wrap angle can

25 be controlled by a closed control loop, in which the reference $WOT_{ref} = WOT_{ref}(d)$ is given and the wrap angle is regulated based on the measurement of WOT.

Above, the invention has been described with reference to some of its advantageous exemplifying applications only, but the invention is not by any

30 means meant to be narrowly limited to the details of them.

Claims

1. A method for controlling the structure of a fibrous web roll, in which method a fibrous web (W) is wound into a fibrous web roll (15, 25, 35) through a winding nip (N) between the fibrous web roll (15, 25, 35) being formed and a winding drum (13, 23, 33), **characterized** in that, in the method, the structure of the fibrous web roll (15, 25, 35) being formed is controlled by regulating the direction of passing the web to a windup, thereby regulating the wrap angle.
2. A method as claimed in claim 1, **characterized** in that, in the method, the wrap angle (α) is regulated by moving the position of a guide roll/guide rolls (11, 12, 21, 22, 31) of the fibrous web (W) with respect to the winding drum (13, 23, 33).
3. A method as claimed in claim 1 or 2, **characterized** in that, in the method, the wrap angle is regulated when there is slippage between the fibrous web (W) and the winding drum (13, 23, 33).
4. A method as claimed in any one of claims 1 to 3, **characterized** in that the method is applied during winding operation in connection with each set.
5. A method as claimed in any one of claims 1 to 4, **characterized** in that the method is used with at least one other control mode affecting the structure of the fibrous web roll (15, 25, 35), in which method the structure of the fibrous web roll being formed is controlled by regulating the tension of the web before a windup and/or by regulating winding force and/or by regulating the radial nip load in nips.
6. A method as claimed in any one of claims 1 to 5, **characterized** in that the wrap angle (α) is made larger to provide a harder fibrous web roll (15, 25, 35).
7. A method as claimed in any one of claims 1 to 5, **characterized** in that the wrap angle (α) is made smaller to provide a softer fibrous web roll.

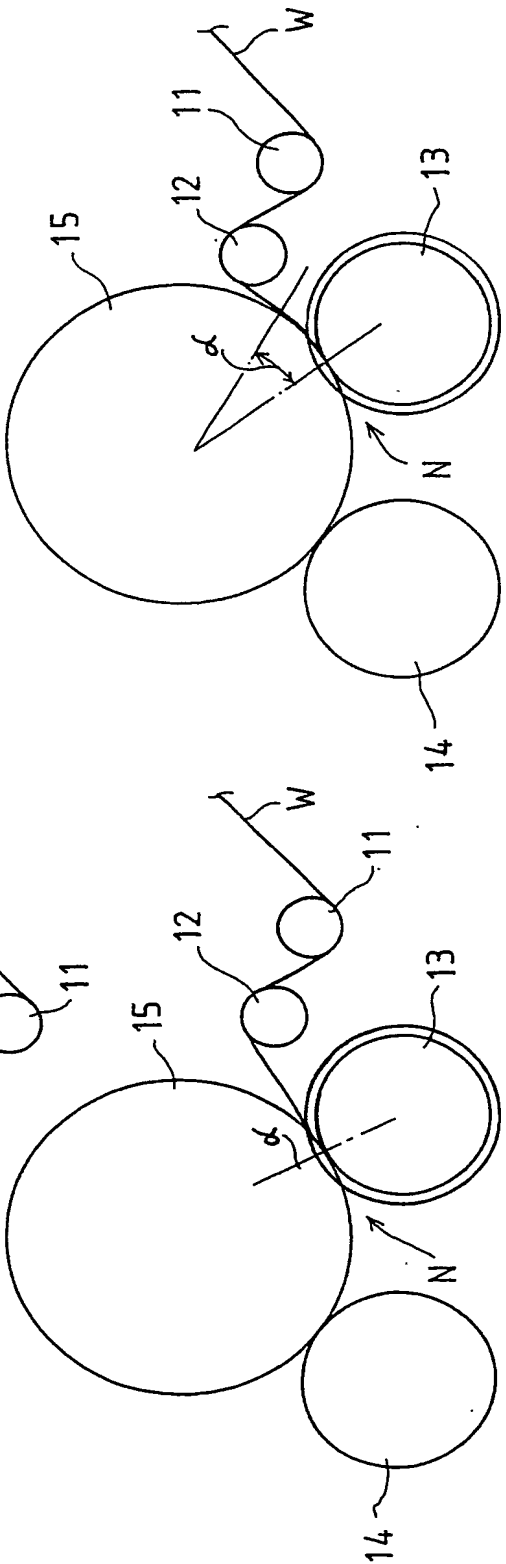
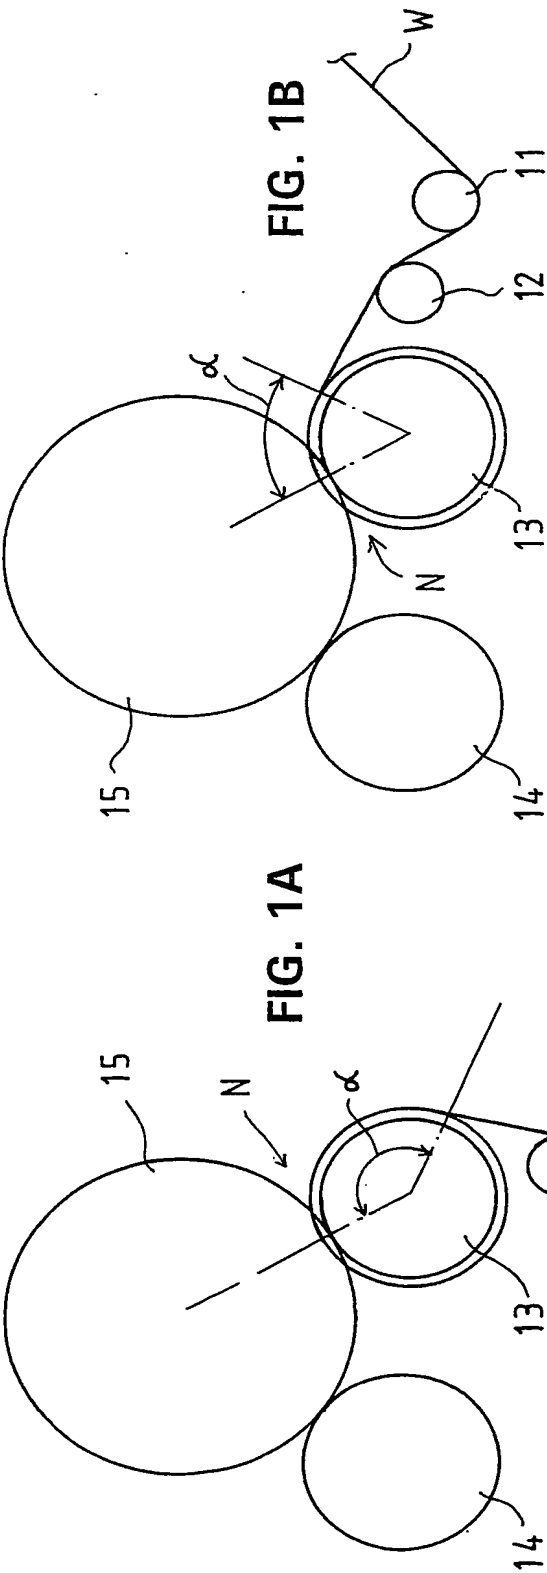


FIG. 1D

FIG. 1C






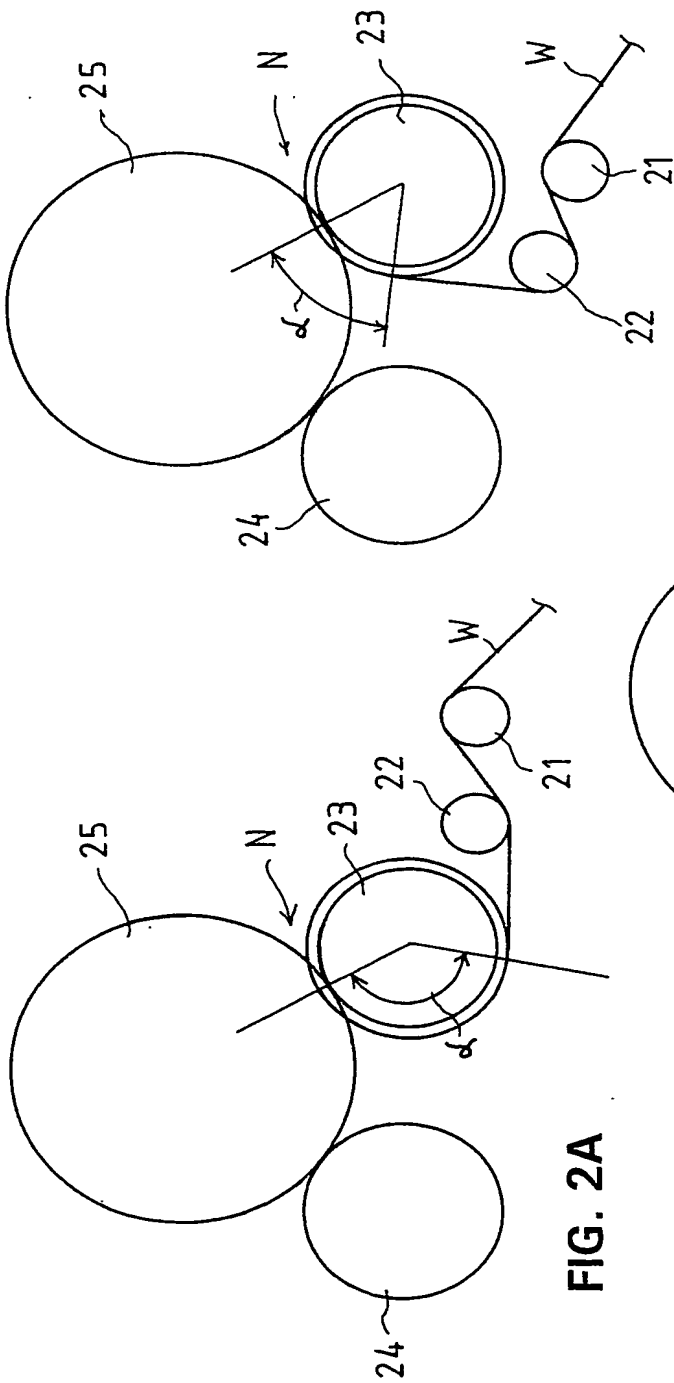


FIG. 2C

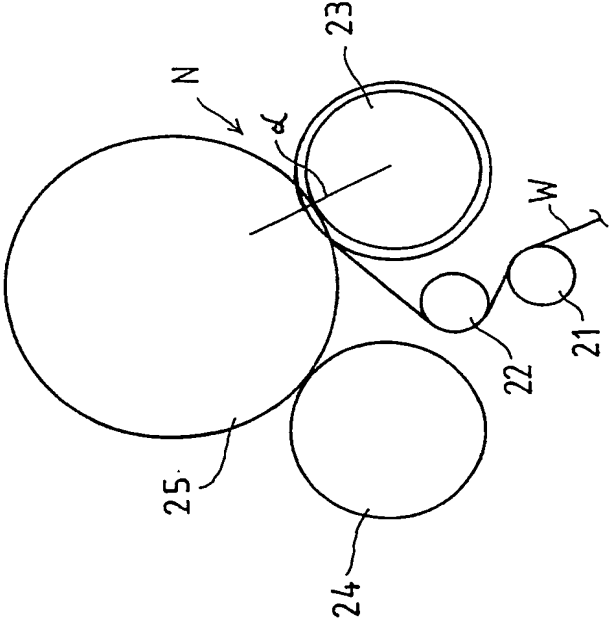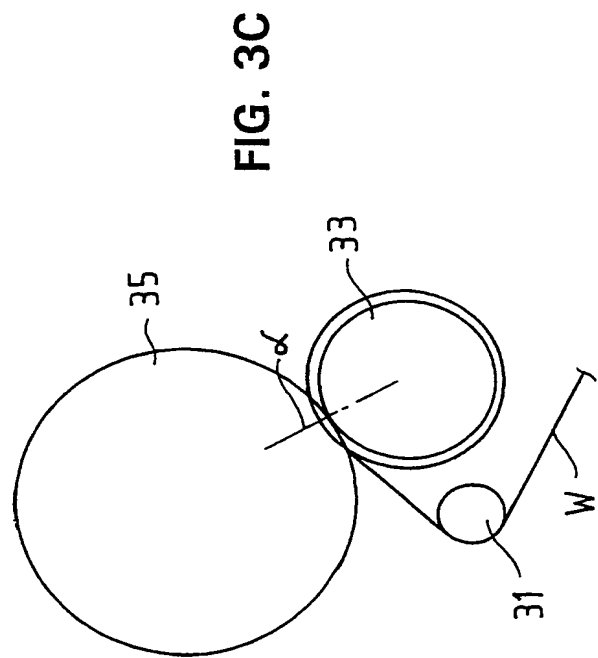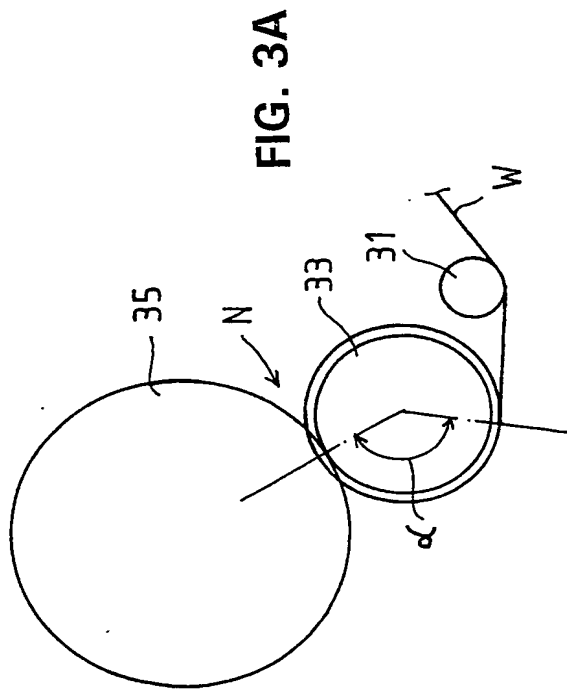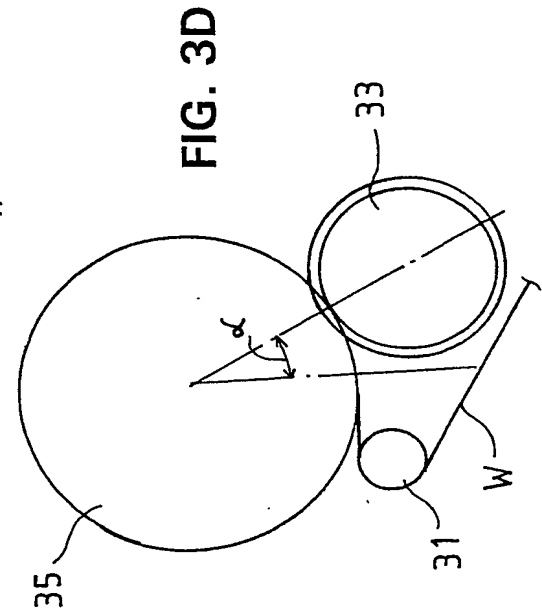

3/4

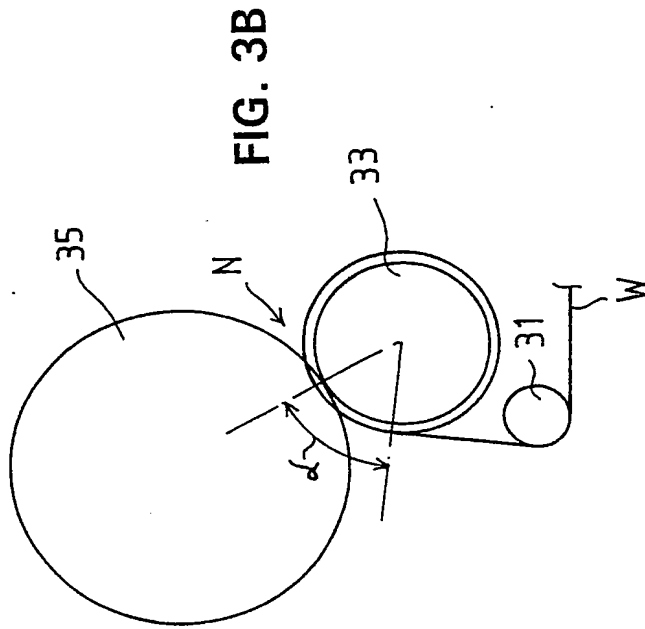

4/4

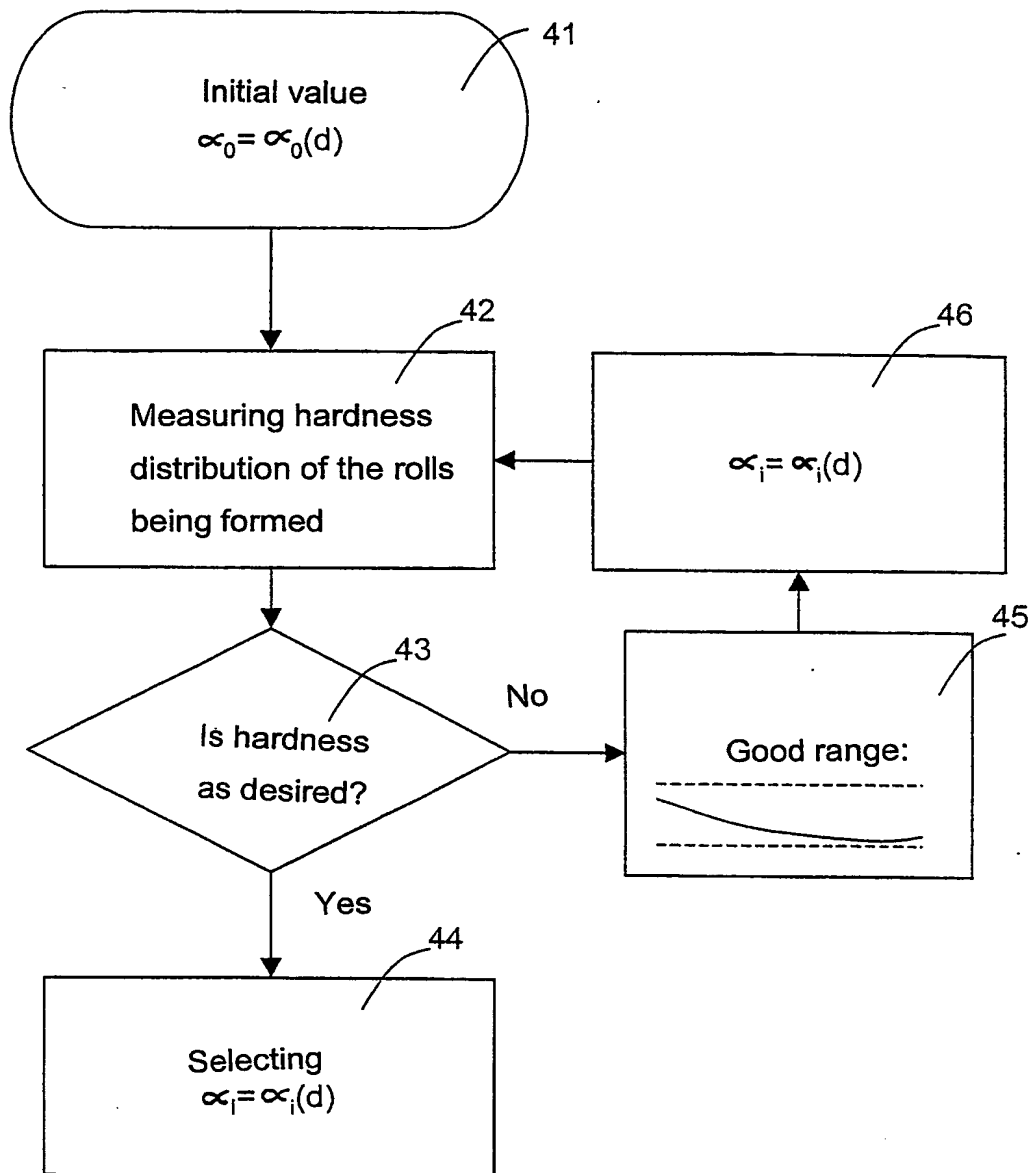


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/FI 03/00456

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 B65H18/14 B65H18/26 //B65H18/20				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 B65H				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 5 335 871 A (FISSMANN HANS-JOACHIM ET AL) 9 August 1994 (1994-08-09) column 1, line 37 - line 53 column 4, line 22 - column 5, line 1; figures	1-7		
A	--- US 4 598 877 A (OINONEN HANNU) 8 July 1986 (1986-07-08) the whole document	1-7		
A	--- US 5 758 842 A (DORFEL GERHARD W ET AL) 2 June 1998 (1998-06-02) the whole document	1-7		
A	--- US 4 465 243 A (WELP EWALD G) 14 August 1984 (1984-08-14) the whole document ---	1-7		
-/--				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.				
° Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; border: none;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; vertical-align: top; border: none;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">8 September 2003</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">19 7. 10. 03</div>		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3018		Authorized officer <div style="text-align: center; font-weight: bold;">TEIJA RASCH/JAA</div>		

INTERNATIONAL SEARCH REPORT

International Application No
PCT/FI 03/00456

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 562 261 A (BEISSWANGER RUDOLF ET AL) 8 October 1996 (1996-10-08) the whole document</p> <p>-----</p>	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/FI 03/00456

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5335871	A	09-08-1994	AT 194583 T 15-07-2000
		CA 2092462 A1 27-09-1993	
		DE 9204667 U1 06-08-1992	
		DE 59310072 D1 17-08-2000	
		EP 0562266 A1 29-09-1993	
		EP 0957052 A2 17-11-1999	
		FI 931096 A 27-09-1993	
		JP 2908171 B2 21-06-1999	
		JP 6115771 A 26-04-1994	
US 4598877	A	08-07-1986	FI 841448 A 12-10-1985
		AT 395843 B 25-03-1993	
		AT 93085 A 15-08-1992	
		AU 574450 B2 07-07-1988	
		AU 4038585 A 17-10-1985	
		CA 1249805 A1 07-02-1989	
		DE 3512268 A1 02-01-1986	
		FR 2562879 A1 18-10-1985	
		GB 2157273 A ,B 23-10-1985	
		NO 851381 A 14-10-1985	
		SE 456083 B 05-09-1988	
		SE 8501741 A 12-10-1985	
US 5758842	A	02-06-1998	DE 9317616 U1 16-03-1995
		AT 182315 T 15-08-1999	
		BR 9408070 A 24-12-1996	
		CA 2176957 A1 26-05-1995	
		DE 59408528 D1 26-08-1999	
		WO 9513980 A1 26-05-1995	
		EP 0729432 A1 04-09-1996	
		ES 2135687 T3 01-11-1999	
		FI 962096 A 17-05-1996	
		JP 2762316 B2 04-06-1998	
		JP 9502686 T 18-03-1997	
		PL 314291 A1 02-09-1996	
US 4465243	A	14-08-1984	DE 3121039 A1 23-12-1982
		BR 8201686 A 16-02-1983	
		CA 1171832 A1 31-07-1984	
		ES 8304015 A1 16-05-1983	
		FI 69818 B 31-12-1985	
		FR 2506737 A1 03-12-1982	
		IT 1149629 B 03-12-1986	
		JP 1926309 C 25-04-1995	
		JP 6041334 B 01-06-1994	
		JP 57199746 A 07-12-1982	
US 5562261	A	08-10-1996	DE 4402624 A1 23-06-1994
		DE 4419662 A1 03-08-1995	
		AT 168351 T 15-08-1998	
		CA 2141467 A1 01-08-1995	
		DE 59406454 D1 20-08-1998	
		EP 0665178 A2 02-08-1995	
		ES 2119057 T3 01-10-1998	
		FI 946001 A 01-08-1995	
		JP 8259057 A 08-10-1996	
		NO 950340 A 01-08-1995	